

Model X15J PLUS

COMPACT CRAWLERS



MORE ECONOMIC

- Minimal emissions and noise pollution.

MORE PRODUCTIVE

- Reduce your set-up time with auto-levelling outriggers.

MORE ACCESS

- Equipped with track drive for easy manoeuvrability in sensitive environments.

SMART DESIGN

- Low weight for ease of transportation and operation in weight restricted areas.

Standard Features

- 0.69 m x 1.34 m Aluminium 2 person platform
- Slide bar rear entry
- Footswitch
- Full proportional control
- Articulating jib
- Powered platform rotator (124°)
- Remote Control (via cable to platform)
- Full Remote Control of drive and stabilization
- Multi-lingual LCD display on platform console
- Platform console position sensor and lock
- Envelope management load sensing system
- Platform designed for ease of removal/changeover with casters
- AC Cable to platform
- 6.5 mm Airline to platform
- 12.6 mm Waterline to platform
- Engine protection
- Rubber Outrigger Pads
- Cylinder Rod Protection on Outriggers
- Automatic cut-out when out of level
- Powered track extensions/retraction
- 360° non-continuous turntable rotation
- Turntable alignment sensor and gauge
- Three emergency descent systems
- Electro-hydraulic controls
- Full pressure hydraulic controls
- Lifting/Tie down points
- Forklift Pockets

Standard Specifications

Power Source

- Gasoline Engine Honda iGX390
- Electric Engine 220V, 50 Hz

8.7 kW (11.7HP) at 3600RPM
2.2 kW

Tires

- Standard

1.24 m x 0.18 m x 0.30 m Low Profile
Non Mark Rubber Tracks

Accessories & Options

- 100Ah 36V Lithium ion power pack
- 1.24 m x 0.18 m x 0.30 m Low Profile Black Rubber Tracks
- Hatz 1B40 7.5 kW (10 HP) at 3600RPM Diesel Engine
- 110V, 502 Hz — 2.2 kW Electric Engine
- 2nd (high) Drive speed Automatic Shift Gears

Model X15J PLUS


COMPACT CRAWLERS

Performance


- Working Height 15.40 m
- Working Outreach 6.60 m
- Up & Over Height w 230 kg 7.0 m
- Swing (non continuous) 360°
- Jib - overall length 1.68 m
- Jib - range of articulation 89° (+0/-89°)
- Platform size (standard 2 persons) 0.69 m x 1.34 m
- Stowed width (with std. 2P platform) 1.48 m
- Dimensions:
 - A. Stowed width (without platform) 0.748 m
 - B. Stowed height (on tracks) 1.99 m
 - C¹. Stowed length (on tracks) with Basket 4.02 m
 - C². Stowed length (on tracks) without Basket 3.40 m
 - D. Outrigger footprint 2.88 x 2.88 m
- Machine weight (with standard platform) 1,910 kg
- Maximum drive speed 2.5 km/h
- Gradeability 28%
- Max. Approach / Depart angles Front 21° / Rear 20°
- Width of Undercarriage (Retracted/Extended) 0.748 m / 1.10 m



Reach Diagram

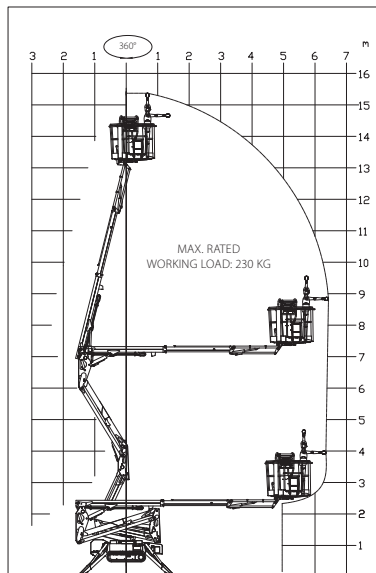

Dimensions

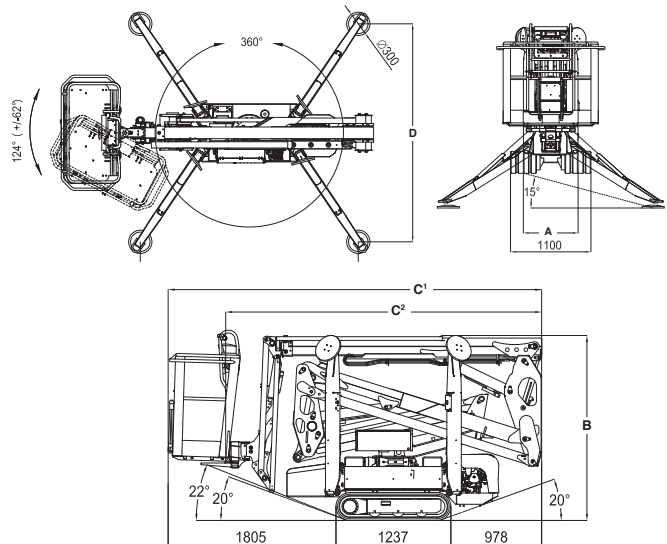

全国服务热线
400-015-0055
销售 租赁 培训 维修 服务



IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

中建锦程机械设备（上海）有限公司

移动热线：13472411713
办公室电话：021-61111068
企业邮箱：info@ccbflift.com
地址：上海市青浦区盈港东路6400号

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

网址：www.jlg-jlg.com