

Model X20J PLUS

COMPACT CRAWLERS



MORE ECONOMIC

- Minimal emissions and noise pollution.

MORE PRODUCTIVE

- Reduce your set-up time with auto-levelling outriggers.
Unrestricted 230kgs basket capacity.

MORE ACCESS

- Equipped with track drive for easy manoeuvrability in sensitive environments.

SMART DESIGN

- Low weight for ease of transportation and operation in weight restricted areas.

Standard Features

- 0.69 m x 1.34 m Aluminium 2 person platform
- Slide bar rear entry
- Footswitch
- Full proportional control
- Articulating jib
- Powered platform rotator (124°)
- Remote Control (via cable to platform)
- Full Remote Control of drive and stabilization
- Multi-lingual LCD display on platform console
- Platform console position sensor and lock
- Envelope management load sensing system
- Platform designed for ease of removal/changeover
- AC Cable to platform
- 6,5 mm air line to platform
- Engine protection
- Rubber Outrigger Pads
- Cylinder Rod Protection on Outriggers
- Automatic cut-out when out of level
- Powered track extensions/retraction
- 360° non-continuous turntable rotation
- Turntable alignment sensor and gauge
- Three emergency descent systems
- Electro-hydraulic controls
- Full pressure hydraulic controls
- 2nd (high) Drive speed
- Lifting/Tie down points
- Forklift pockets

Standard Specifications

Power Source	
• Engine Honda iGX440	11 kW Petrol
• AC electric motor 230 V, 50 Hz	2.2 kW
Tires	
• Standard	1.46 m x 0.2 m x 0.35 m Low Profile Non Mark Rubber Tracks



Accessories & Options

- 110 V, 50 Hz single phase power system
- 100 Ah/ 72 V Electric engine with Lithium battery package incl. battery charger ¹
- Perkins 402D05 - 10.2 kW (14 HP) diesel engine
- 1.46 m x 0.2 m x 0.35 m Low Profile Black Rubber Tracks
- 0.59 m x 0.79 m platform in addition to two person platform
- Special paint colour

¹ Replaces both combustion and electric engines

Model X20J PLUS


COMPACT CRAWLERS

Performance


- Working Height 20.05 m
- Working Outreach 9.85 m
- Up & Over Height w 230 kg 8.2 m
- Swing (non continuous) 360°
- Jib - overall length 1.68 m
- Jib - range of articulation (+/-) 89° (+0/-89°)
- Platform size (standard 2 persons) 0.69 m x 1.34 m
- Stowed width (with std. 2P platform) 1.48 m
- Dimensions:
 - A. Stowed width (without platform) 0.795 m
 - B. Stowed height (on tracks) 1.99 m
 - C. Stowed length (on tracks) 5.00 m
 - D. Outrigger footprint 2.92 m x 2.93 m
- Machine weight (with standard platform) ¹ 2,840 kg
- Gradeability 28%
- Maximum operating slope 16°
- Max. Approach / Depart angles 20°
- Width of Undercarriage (Retracted/Extended) 0.79 m / 1.09 m
- Max. ground bearing pressure (on outriggers) 3.10 kg/cm²
- Max. drive speed (single speed m/c) Petrol 1.3 Km/h

¹ Certain options or country standards may increase weight and/or dimensions.

Reach Diagram

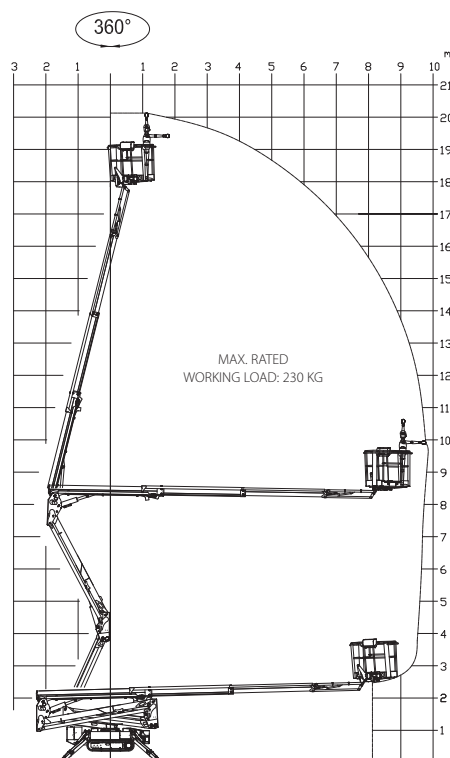

Dimensions

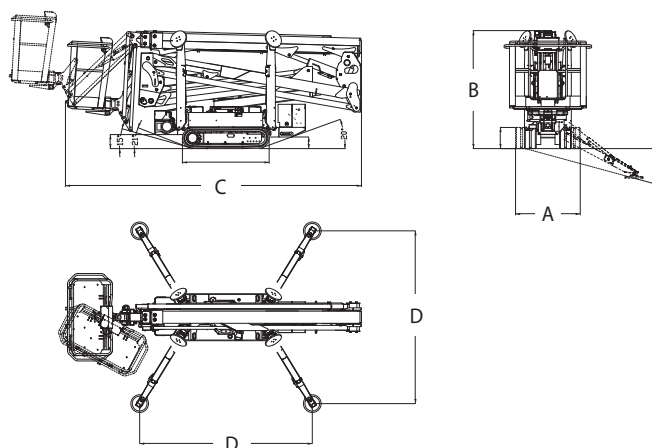

全国服务热线
400-015-0055
销售 租赁 培训 维修 服务



IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

中建锦程机械设备（上海）有限公司

移动热线：13472411713
办公室电话：021-61111068
企业邮箱：info@ccbflift.com
地址：上海市青浦区盈港东路6400号

网址：www.jlg-jlg.com